

Certificate of Conformance

to

EN15767-1 (2009) Portable Monitor Standard

Task Force Tips, LLC certifies that the following portable monitors meet or exceed the requirements found in the EN15767-1 (2009) standard.

BLITZFIRE®/BLITZFIRE® HE model numbers:

XX*2**	XX*3**	XX*4**	XX*5**	XX*6**
XX*7**	XX*8**	XX*9**	XX*A**	XXP**2A



*For supporting documentation
contact us at tft.com*

TASK FORCE TIPS

Delivers what our customers need, when they need it.



TASK FORCE TIPS LLC
REGISTERED TO ISO 9001:2015
FILE NUMBER 10001004 QM15

Annex B (normative)

B.1 General Data

Manufacturer	Task Force Tips, LLC, Valparaiso, IN				
Model	BLITZFIRE/BLITZFIRE-HE models below:				
	XX*2**	XX*3**	XX*4**	XX*5**	XX*6**
	XX*7**	XX*8**	XX*9**	XX*A**	XXP**2A
Maximum stated flowrate (l/min) Qmax	2000 l/min				

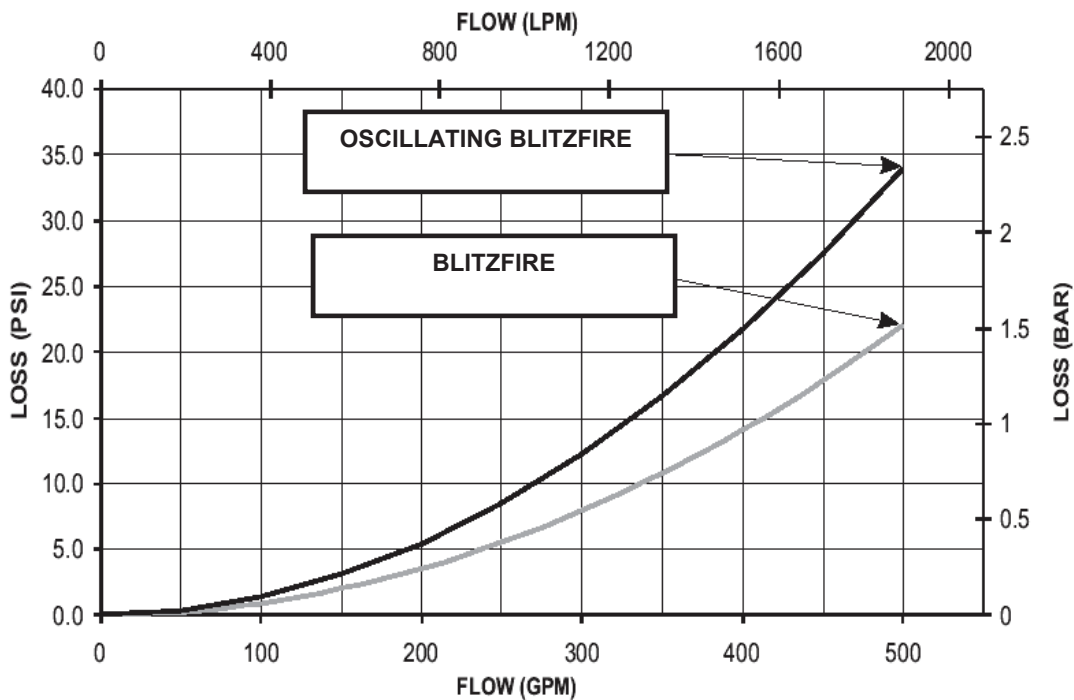


Figure B.1- Pressure loss chart

B.2 Operational devices

Fitting System	Swiveling
Horizontal and Vertical travel device (optional)	None
Open and shut off device (optional)	Bale Handle
Oscillating device (optional)	Adjustable 20°, 30° or 40° sweep
Safety device against uncontrolled motion (optional)	Yes

B.3 Requirements

Number of the relevant clause of this part of the standard	Item	Requirement	Test Result	
5.1.2	Maximum mass (kg)	20 kg	10 kg	
5.1.3.2	Max torques (N·m) or forces (N), needed to move operating elements	Valve Handle	20 N·m	16.3 N·m
		Fitting Systems	15 N·m	3.45 N·m
		Handle Pull Pin	100 N	8.9 N
		Leg Deployment	100 N	17.8 N
5.2	Sensitivity to frost (°C)	-15° C	-15° C	
5.3.1	Burst pressure (bar) if higher than 35 bar	35 bar	40 bar	
6.4	Stability test- movement in (cm), in any direction, in addition to that caused by the expansion of hose(s)	50 cm	0 cm	

B.4 Optional extra data (no requirements)

Ageing test	n/a
UV test	n/a
Ozone test	n/a
Corrosion test	n/a

B.5 Data certified by

Adam Ritchey
Quality Manager
Task Force Tips